


Armstrong® DC FlexZone™ Compatible
luna® family

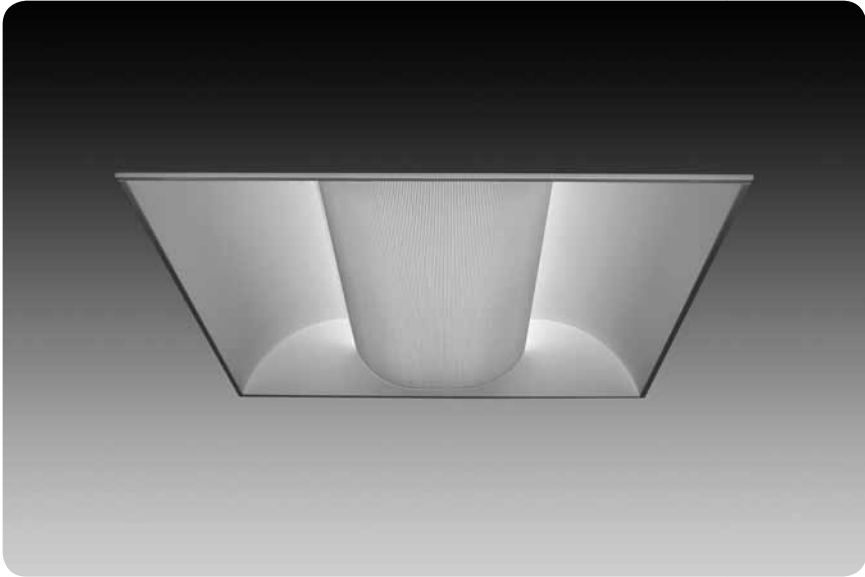

Covered by U.S. Patent No. D395,727.

features

2'x2' and 2'x4' recessed indirect with an 8" or narrow 4" perforated center basket.

Now with EMerge Alliance® Registered options compatible with Armstrong DC FlexZone ceilings for plug-and-play flexibility in DC power applications.

Reflector and end caps form seamless one-piece housing.

High reflectance, low gloss Matte White finish controls glare and provides high efficiency.


Perforated shields snap out for easy relamping.

All luminaire combinations may be continuously row mounted.

Luna® provides high angle uniform distribution ideal for general illumination

dimensional data

standard 8" basket

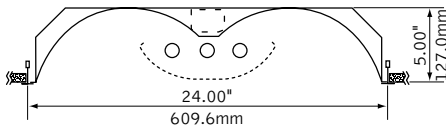

lamping options

2'x2'



BIAX LAMPS




T8 LAMPS




T5H0 LAMPS



2'x4'




T8 LAMPS



T5/T5H0 LAMPS T5 LAMPS

narrow 4" basket

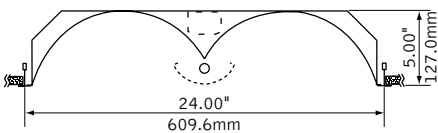

lamping options

2'x2'



T5H0 LAMPS



2'x4'



T5/T5H0 LAMPS

shielding options




Standard 8" basket



Narrow 4" basket

performance

2'x4' Narrow 4" Basket
 1-Lamp T5H0
 87% Efficiency
 1400 cd @ 0°




Visit focalpointlights.com for complete photometric data.


fixture:
project:

mounting information

Armstrong® DC FlexZone™ compatible



"G" flat tee



"ST" slot tee

specifications

construction

One-piece 20 Ga. steel reflector and housing.
20 Ga. steel ends form finished housing.
Lamps are shielded by detachable 22 Ga. steel perforated lamp shield with acrylic lens insert.
Top access 20 Ga. steel ballast compartment.

Weight:
2"x2": 20 lbs
2"x4": 29 lbs

optic

One-piece 20 Ga. steel reflectors finished in Matte Satin White powder coat.

electrical

Class 2 low voltage DC ballasts have a Class "P" rating.
0-10V dimming standard.
Load cable assembly connects fixture to low voltage bus bar.

finish

Polyester powder coat applied over a 5-stage pre-treatment.



ordering

luminaire series		<u>FLU</u>
Luna	FLU	
nominal size		<u> </u>
2' x 2'	22	
2' x 4'	24	
distribution		<u> B </u>
Bi-Directional	B	
lamp quantity		<u> </u>
One Lamp (narrow 4" basket only)	1	
Two Lamp	2	
Three Lamp (2x2 - T8 & T5H0, 2x4 - T8 & T5 Standard 8" basket only)	3	
lamp type		<u> </u>
40 Watt Biax (2x2 only)	BX40	
T5 (2x4 only)	T5	
T5H0 (2x4 - 1-lamp only)	T5H0	
T8	T8	
ballast		<u> DCF </u>
DC 0-10V Dimming Ballast	DCF	
voltage		<u> 24 </u>
24 Volt	24	
mounting		<u> </u>
DC Suprafine® 9/16" Grid	G	
DC Silhouette® 9/16" Slot Tee	ST	
shielding		<u> </u>
Narrow 4" Basket (leave blank for standard 8" basket)	NB	
factory options		<u> </u>
Include 3000K Lamp*	L830	
Include 3500K Lamp*	L835	
Include 4100K Lamp*	L841	
finish		<u> WH </u>
Matte Satin White	WH	

* for more information see Reference section.